




TY 1200Y (M4QT)

- ABS, PC encased
- Laser marking
- IP68
- Great read range
- Customized coding
- UV resistant

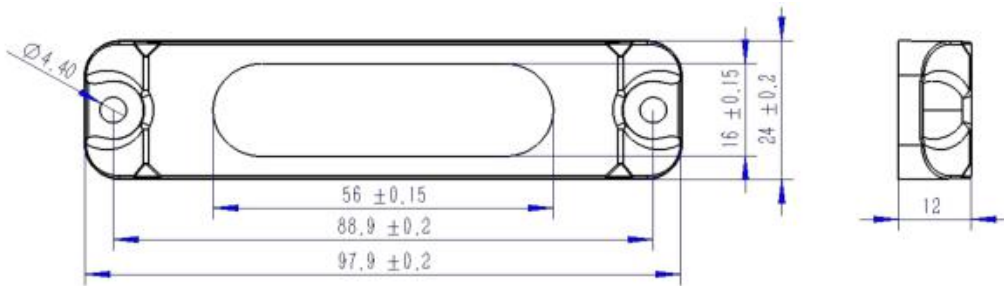

1	Dimension	97.9 * 24 * 12mm
2	Fixed reader (On metal)	12.0 m
3	IC	Impinj M4QT
4	EPC	128 bits
5	User	512 bits
6	Frequency	US: 902-928MHz EU: 866-868MHz
7	Protocol	EPC global Gen2 ISO/IEC 18000-63
8	Temperature resistance	-20 ~ 85 C
9	IP Grade	IP68
10	Attach method	Adhesive / rivet / magnet
11	Application	Metal or non-metal
12	Material	ABS, PC

Note: All performance tests are in a lab environment.