




TY 680Z (MR6P)

- Flexible on metal tag
- RFID printer printable
- IP68
- Quater wave folded design
- Low cost
- Custom color print

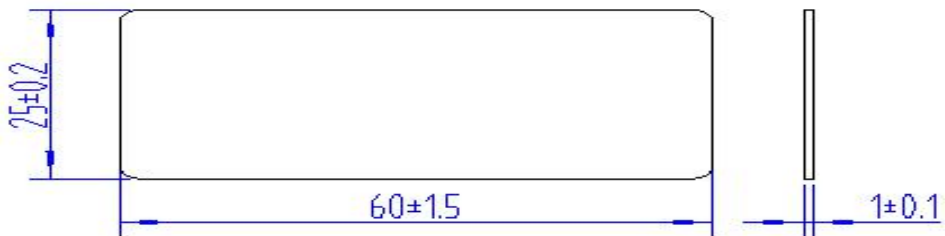

1	Dimension	60 * 25 * 1.0mm
2	Read range (Fixed reader on metal)	6.0 m
3	Chip	Impinj MR 6-P
4	EPC	128 bits
5	User	32 bits
6	Frequency	US: 902-928MHz EU: 866-868MHz
7	Protocol	EPC global Gen2 ISO/IEC 18000-6C
8	Temperature resistance	-20 ~ 85 C
9	IP Grade	IP68
10	Attach method	Double sided adhesive
11	Application	On metal
12	Packaging	500 tags/roll

Note: All performance tests are in a lab environment.